

4000 Turnstiles



PRODUCT SPECIFICATION

Flow Rate

15 to 22 Person Per Minute in Single Direction
Fail Safe or Fail Secure Modes Available

Duty Cycle

100% Heavy Industrial Usage
Suitable for Indoor & Outdoor Usage

Specification

CE Approved, TUV Approved

Power Requirements

Single Phase 240v 50Hz 5 Amps

Colours

All RAL Colours Available
(Galvanised Optional Cost)

Dimensions

Single: 1280mm x 1400mm x 1790mm
Double: 2450mm x 1400mm x 1790mm

Sizes

Rotor: 76mm Tube with Bottom Supported Bearing
Arms: 42mm Tube with Capped Ends
Side Frames: 33mm Tube Welded to Curve Base Plate

Material Construction

Mild Steel Primed & Powder coated as standard Galv
Optional

Unit Weight

230Kg Approx

*All turnstiles are bespoke and manufactured to order.



CAD Drawings
provided as
standard



Tech Support
provided and FREE
mobile APP as
standard



PLUG & PLAY
INSTALLATION

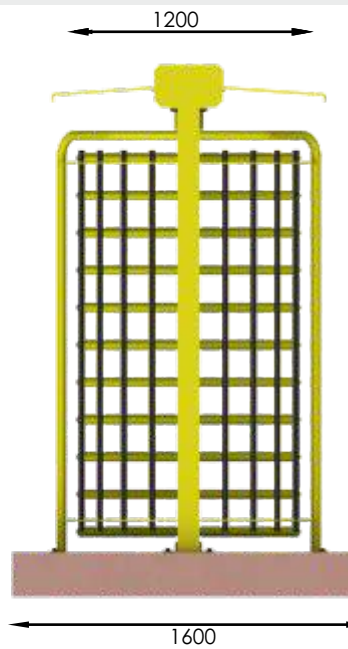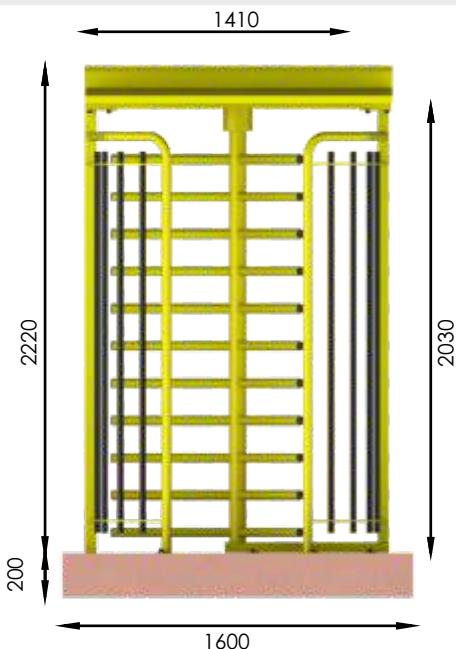

Delivered on our Fleet
of Hi-Ab Vehicles, ready to
bolt down/ connect power
and commission.